

# Wiley Electronics LLC

## Washer, Electrical Equipment Bond


# WEEB

Patent Pending


## INSTALLATION INSTRUCTIONS

# *For DP&W Ground Mounts Only*


Please read carefully before installing.

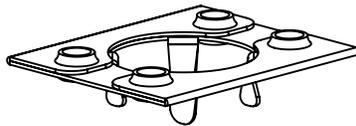

**WEEB-9.5**



**WEEB-9.5 NL**

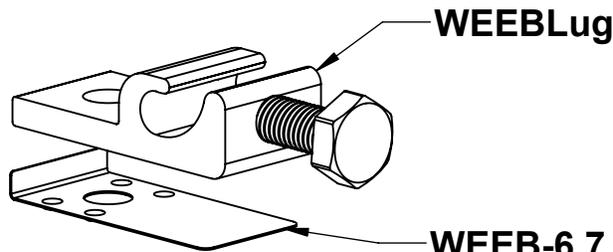

**WEEBL-6.7 assembly**




Products are tested to UL 467 3098177  
UL standard for safety grounding and bonding equipment

Document Number 104-0404-000001-004

Wiley Electronics LLC. 2006-2007© – All Rights Reserved

# System Overview

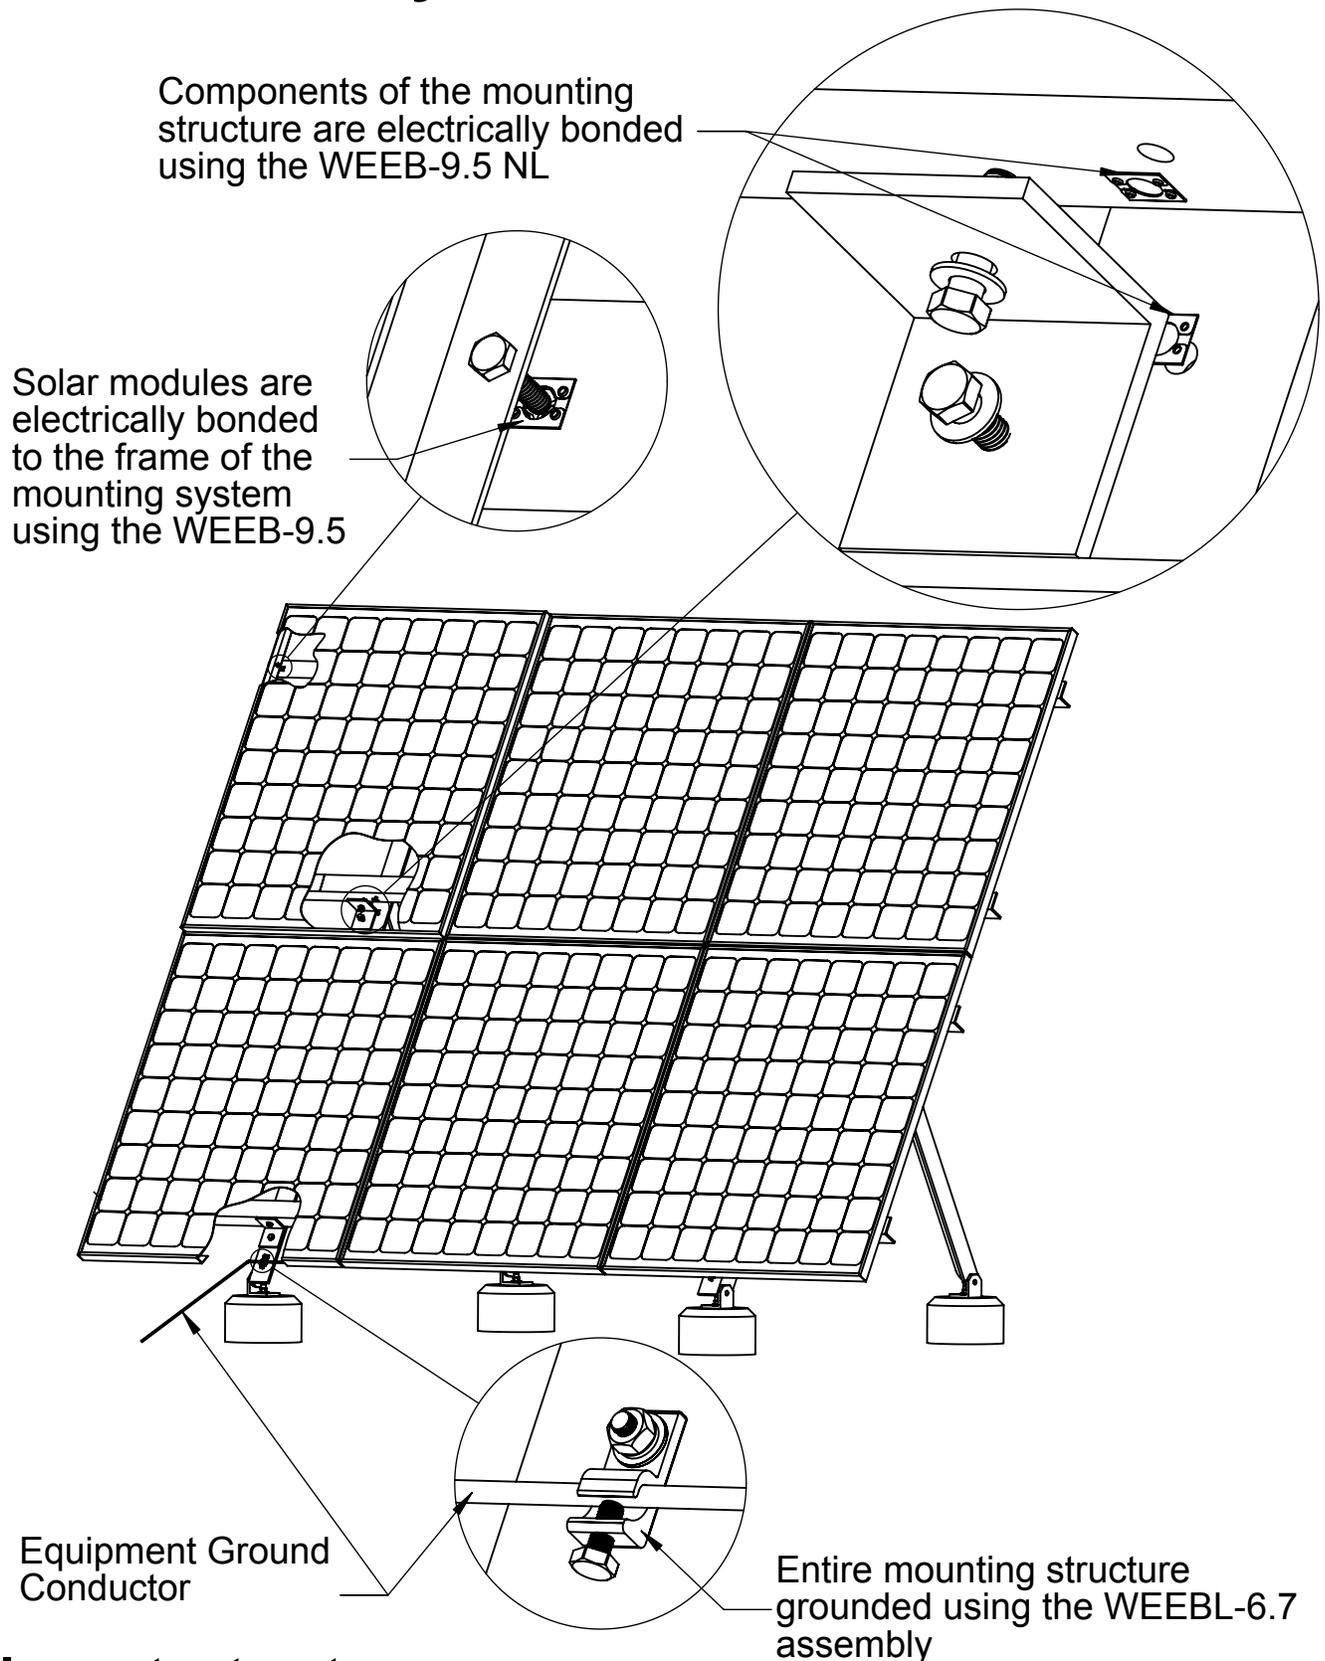


## Important notes:

1. Use general purpose anti-seize compound on fastener threads when installing WEEBs.
2. WEEBs are intended for **SINGLE USE ONLY**. Functionality will not be guaranteed if reused.


# WEEB-9.5 NL Installation

1


Torque fasteners to 15 ft-lb / 20.3 N-m after aligning all the rack members. Use general purpose anti-seize on threads.

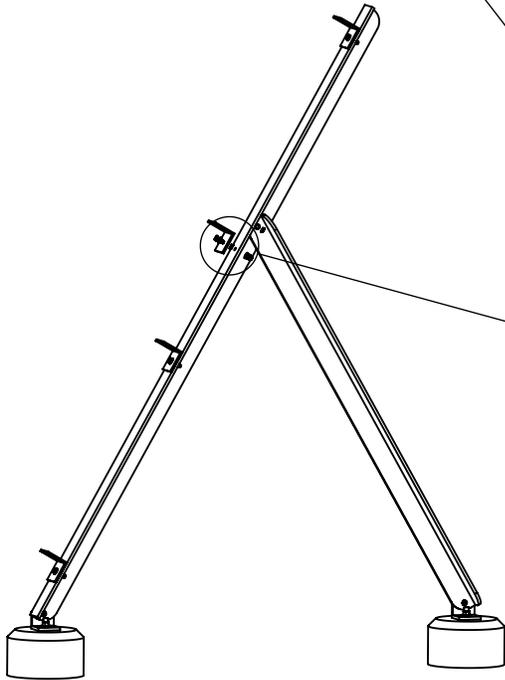

Install WEEB-9.5 NL between angle bracket and mounting frame.

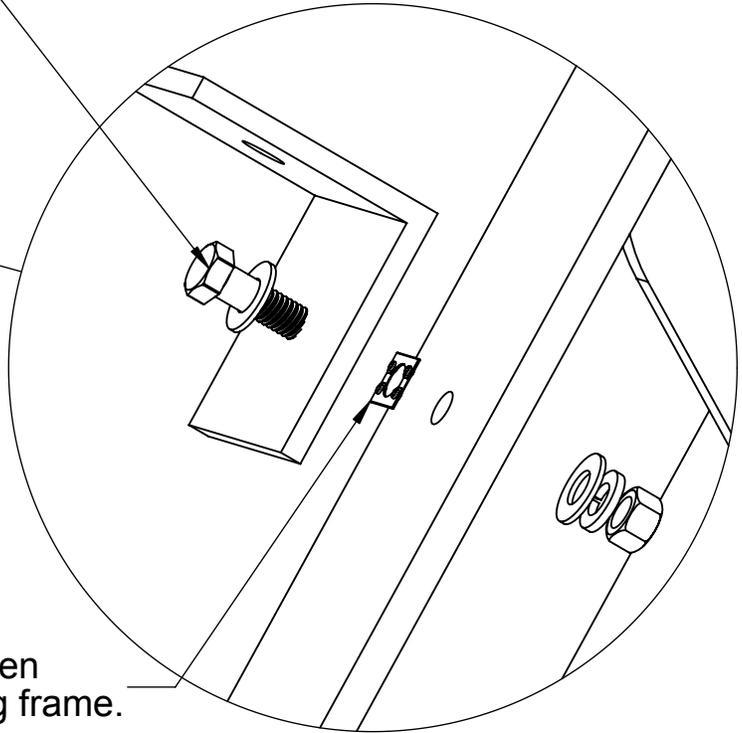


2

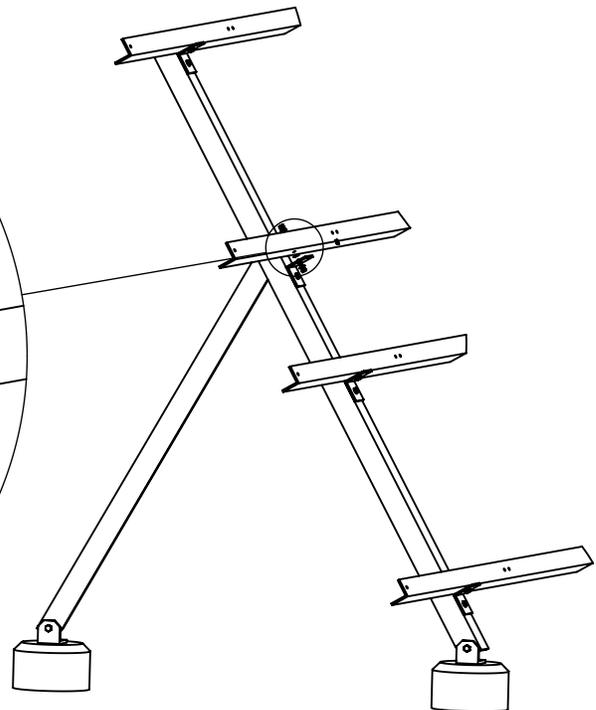

Install WEEB-9.5 NL to bond support frame and panel mounting frame


Torque fasteners to 15 ft-lb / 20.3 N-m after aligning all the rack members. Use general purpose anti-seize on threads.

3

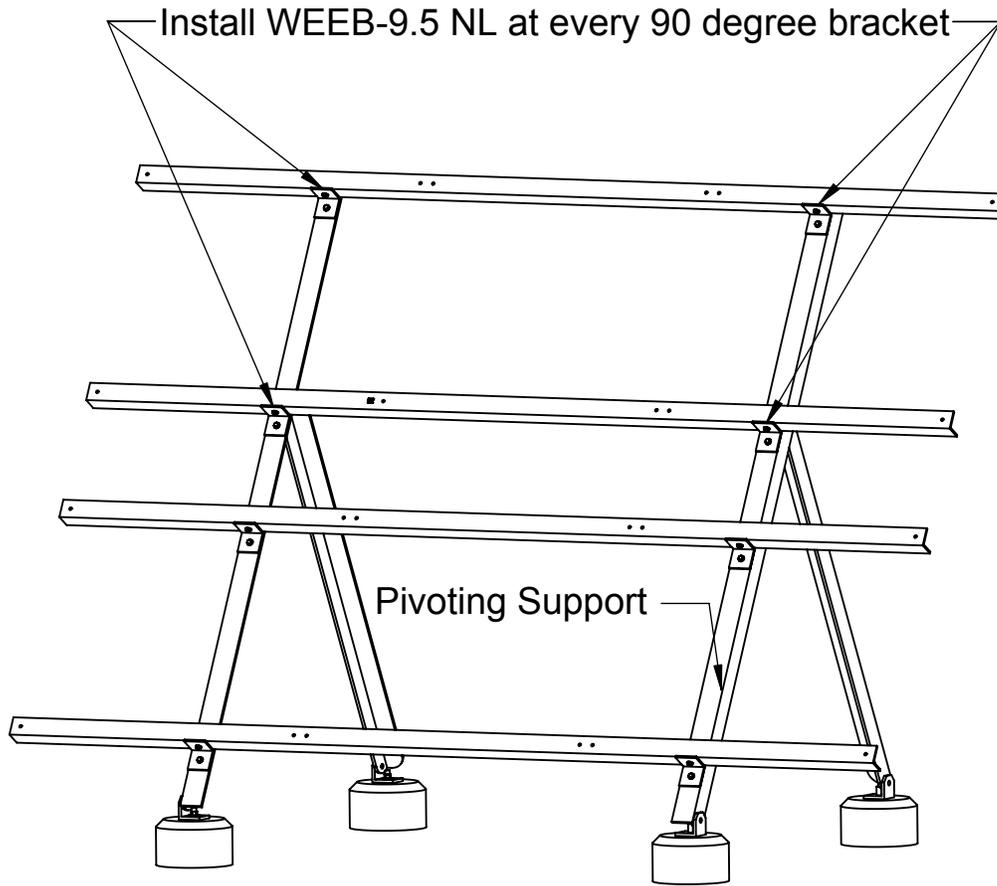


# WEEBLug Installation


4

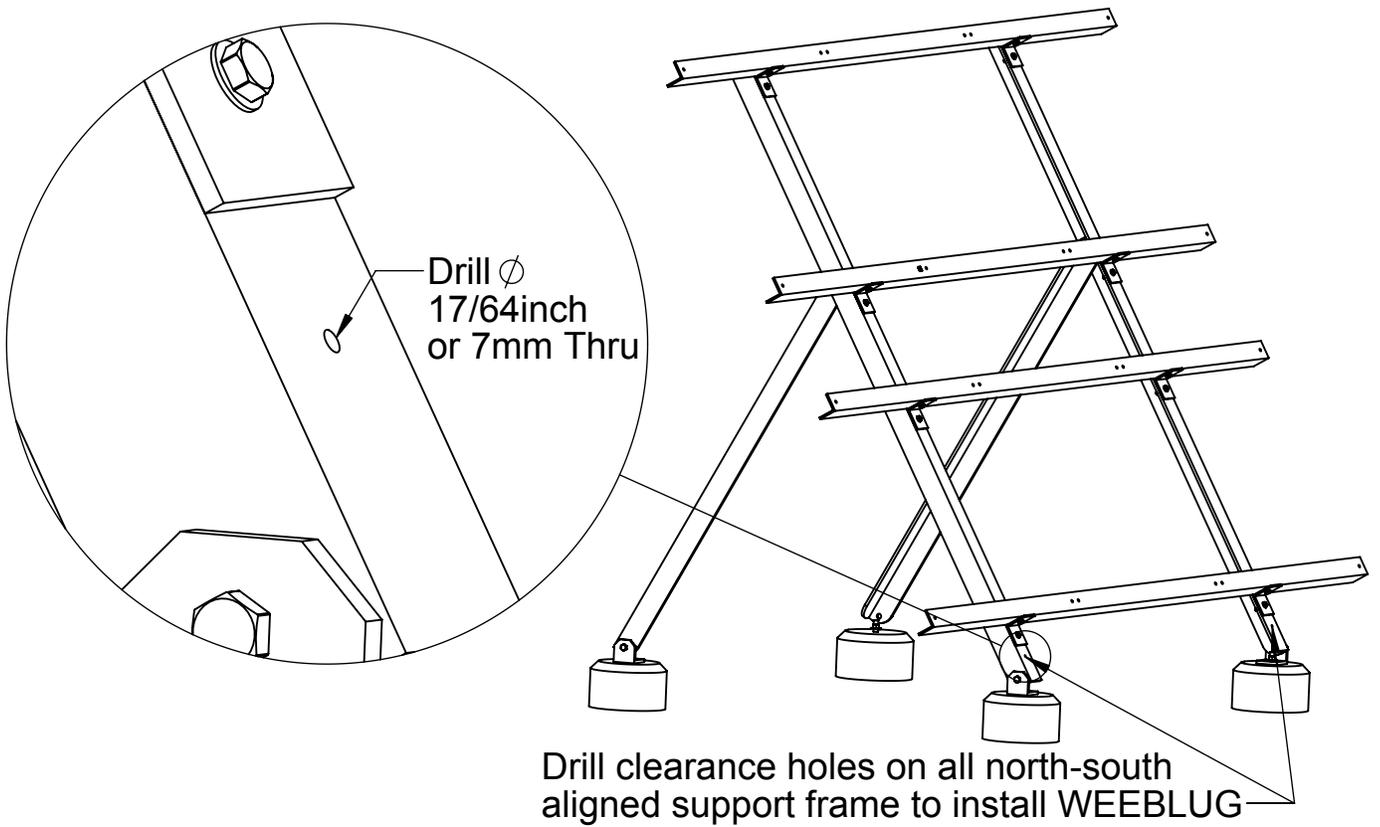

5

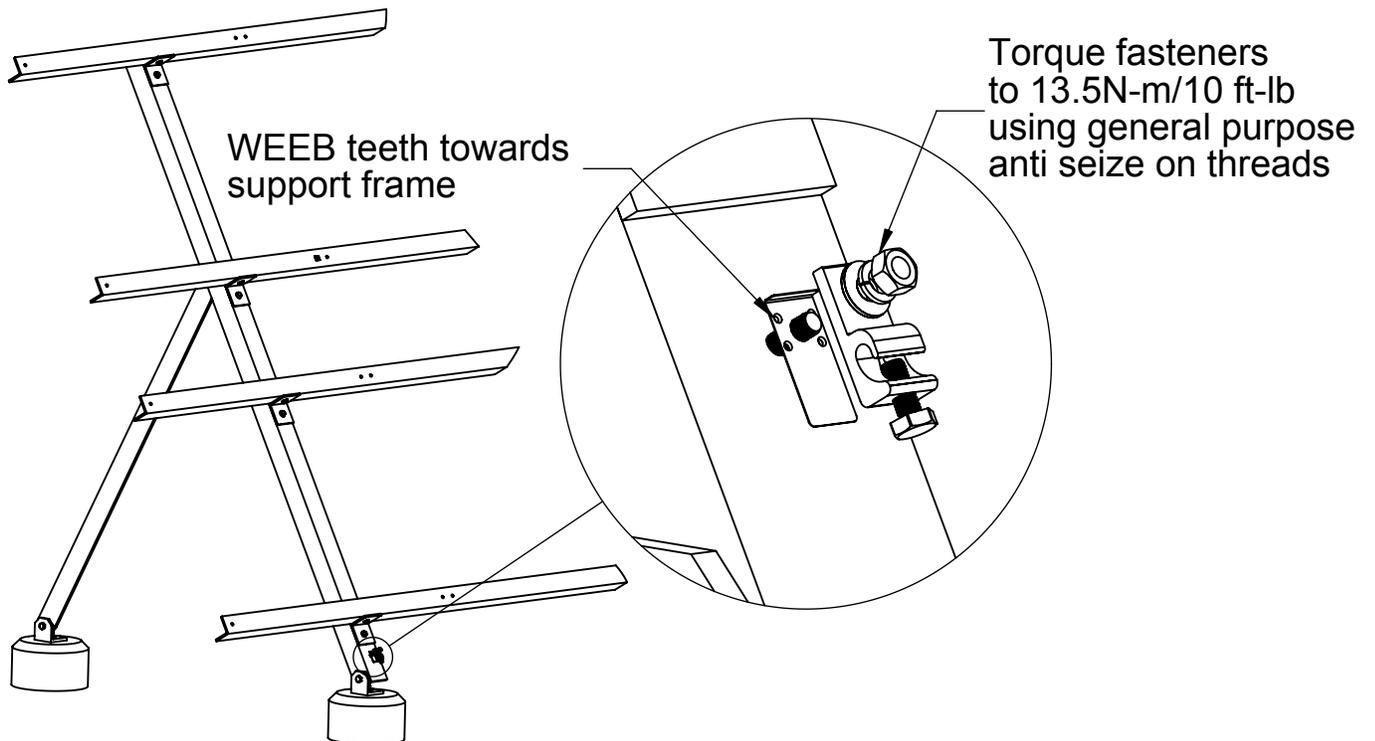


6

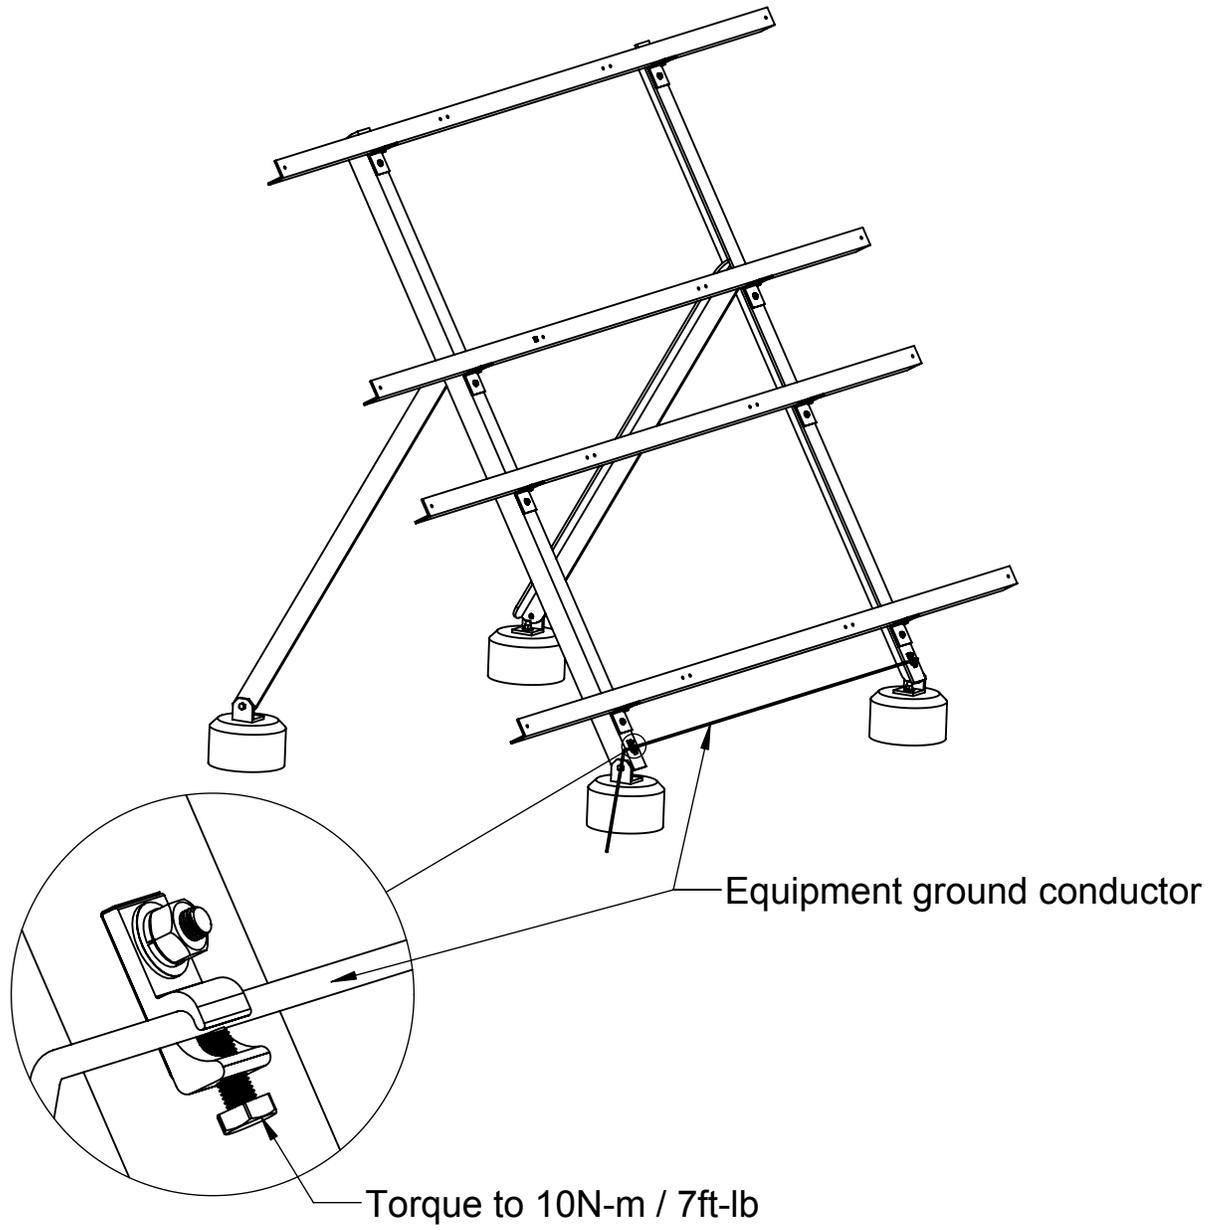


# WEEB-9.5 Installation

7


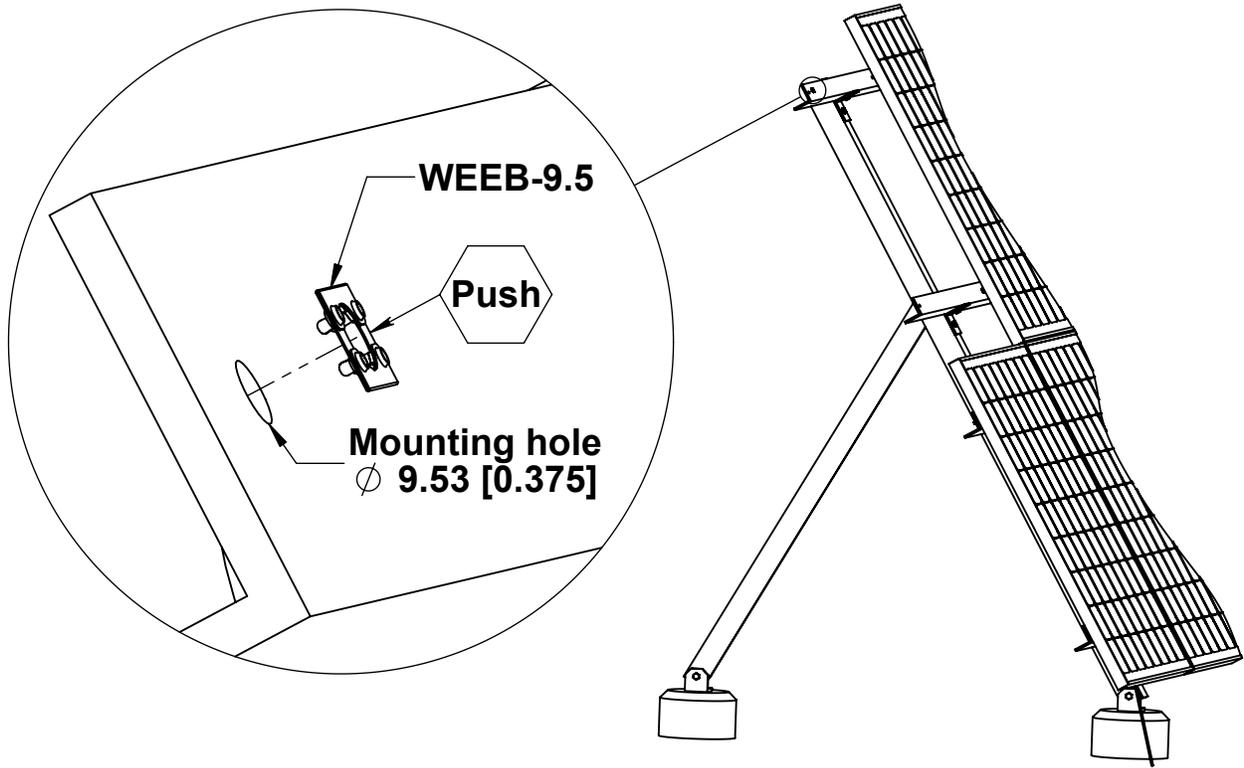


8

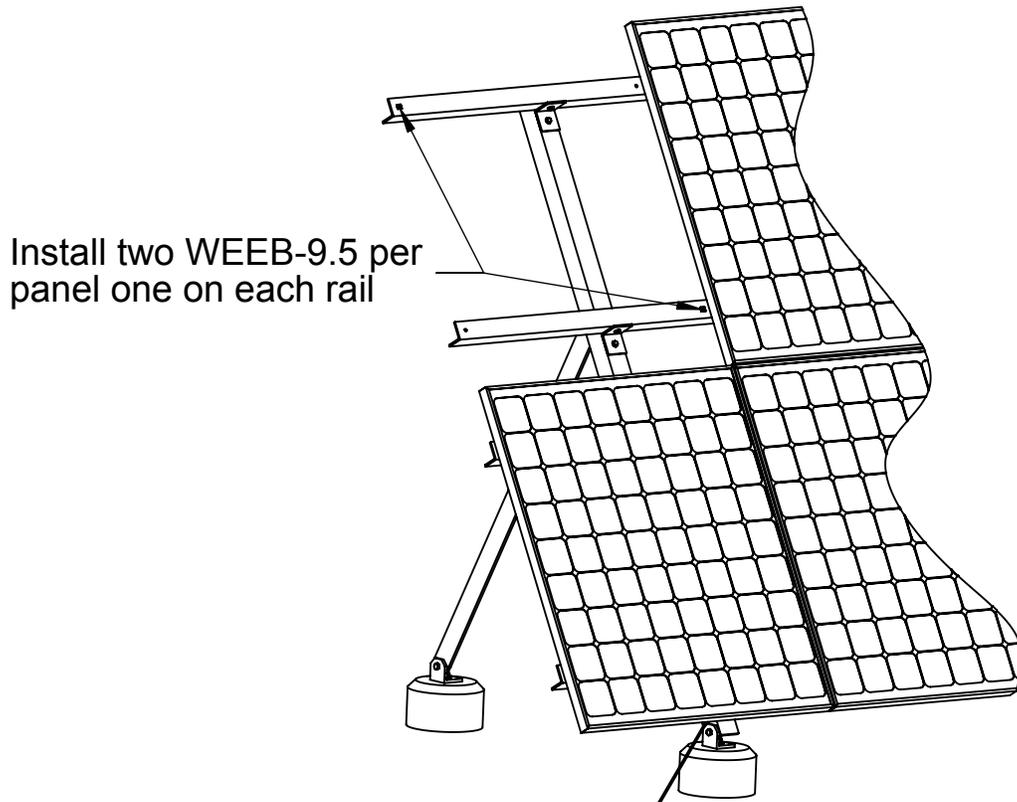

9

Torque to 15ft-lb / 20.3N-m  
using **general purpose anti-seize** on threads

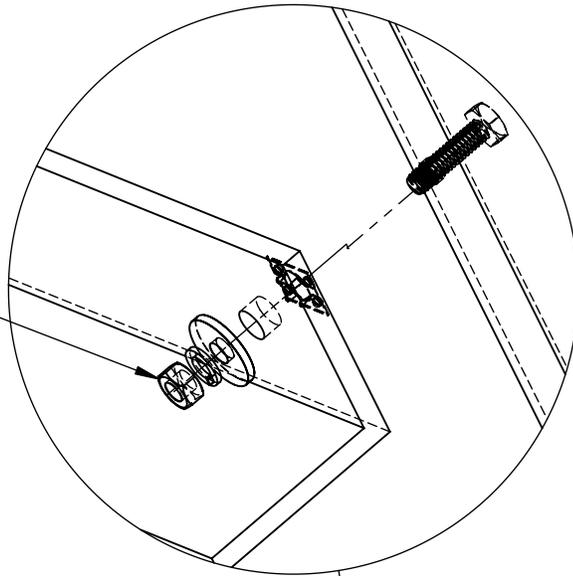

**Required hardware for  
all modules  
WEEB9.5-hw1  
(1/4" hardware)  
except Sharp and BP**

**For Sharp and BP modules  
use WEEB9.5-hw2  
(5/16" hardware)**

